



Replacing the blower in an Alpha 9500

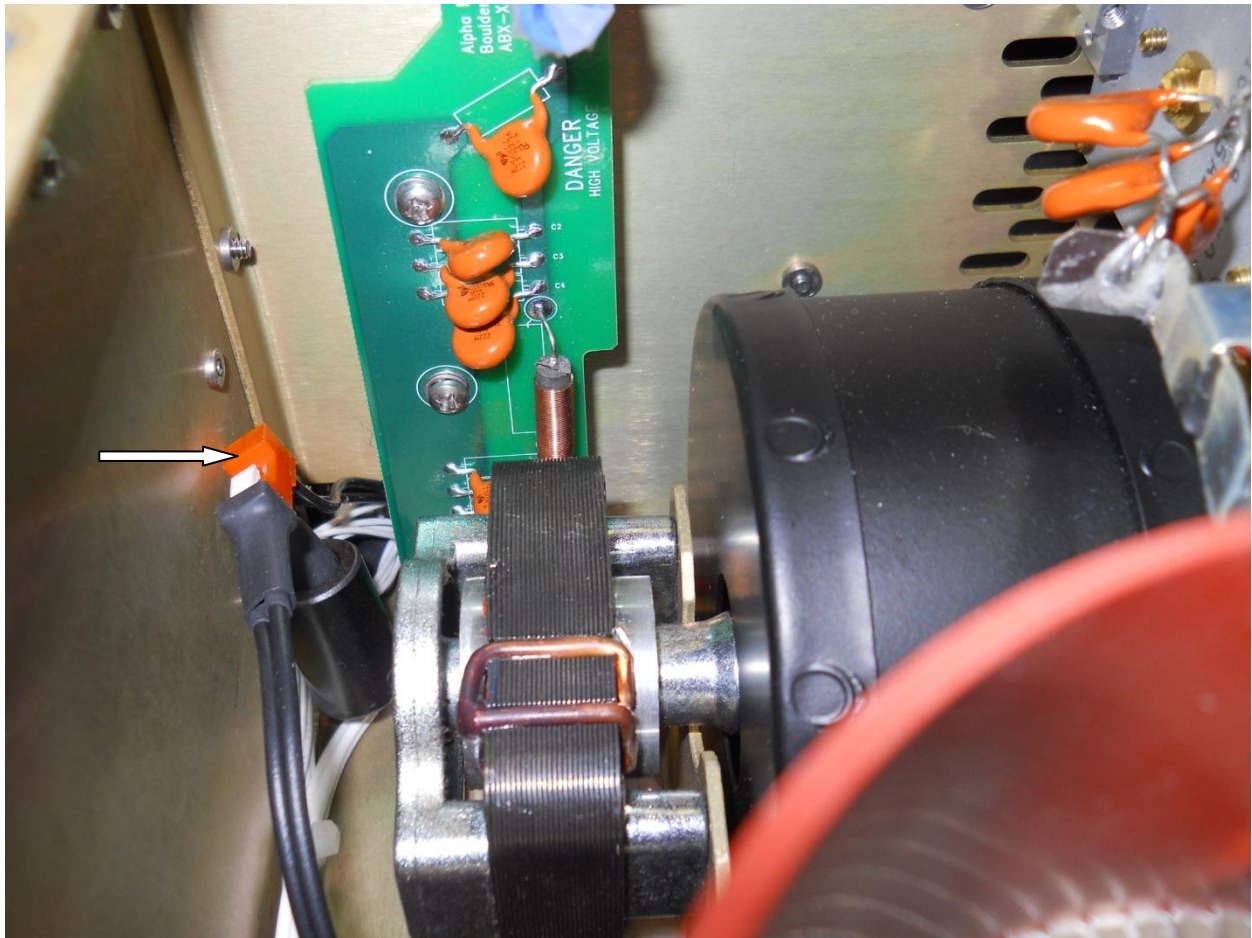

Disconnect the amplifier from the power and remove the cover.

Separate the blower from the chassis by pulling apart the connectors shown at the arrow in the picture.

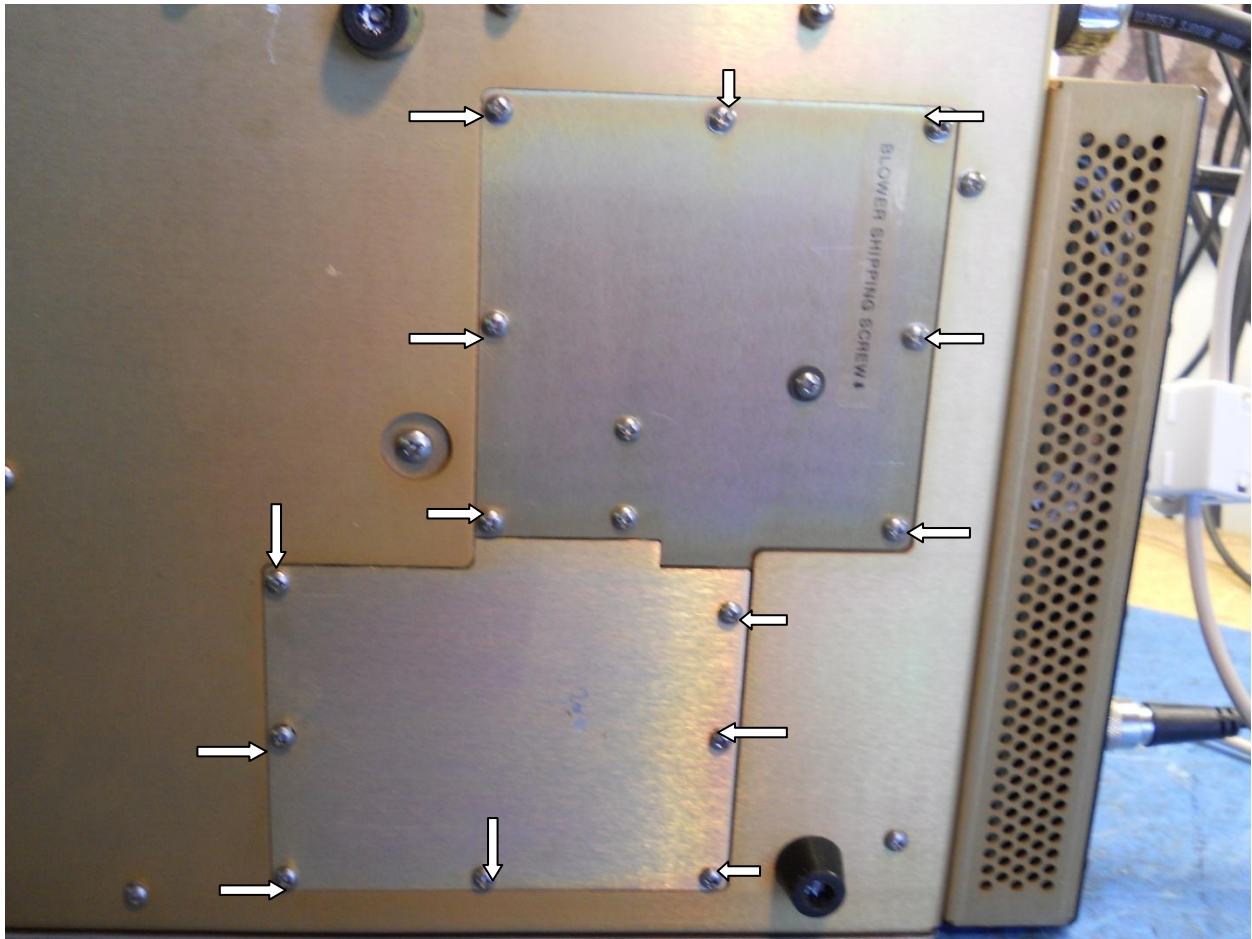

Rotate the amplifier onto its right hand side, i.e. transformer down and the underneath of the chassis exposed.

Remove each of the indicated screws and pull the blower out of the amplifier.

Insert the new blower and put all of the screws back in place.

Rotate the amplifier back onto its feet and connect the new blower wires to the chassis wiring.